




FEATURES / CHARACTERSTICS

Fusion bonded coating comply with AWWA C550

MATERIAL SPECIFICATIONS

DET	QTY	PARTS	MATERIAL
1	1	Lifting Eyey Bolt	ASTM A105
2	1	Hex Nut	ASTM A105
3	1	Washer	ASTM A105
4	1	Hand Wheel	ASTM A536
5	1	Operating Nut	AISI 304/ASTM B62
6	2	Hex Cap Screw	ASTM A105
7	2	Hex Nut	ASTM A105
8	1	Snap Ring	AISI 066
9	1	Target Carrier Nut	AISI 304/ASTM B62
10	4	Target	ASTM B108
11	4	Hex Cap Screw	ASTM A105
12	2	Window Glass	LEXAN-UN
13	2	Window Glass Gasket	PTFE
14	4	Hex Cap Screw	ASTM A105
15	4	Hex Nut	ASTM A105
16	1	Body	ASTM A536
17	1	Stand Pipe	ASTM A53
18	1	Stem	AISI 1045
19	1	Cotter Pin	AISI 304
20	1	Crane Coupling	ASTM A536
21	1	Plug	AISI 304
22	1	Cover	ASTM A126B
23	1	Cross Recessed Countersunk Head Screw	AISI 304
24	1	Locking Nose	ASTM A307B

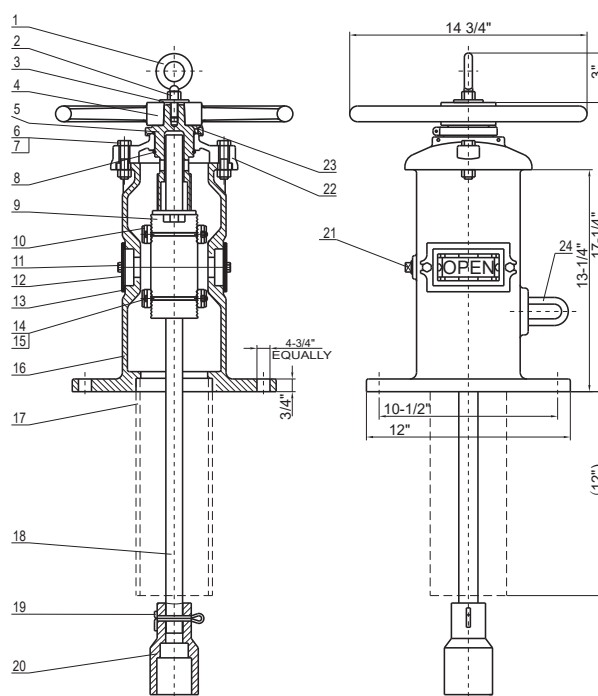

FIELD ADJUSTMENT

1. Remove the top section from the top of the Indicator Post assembly.
2. Set the "OPEN" and "SHUT" targets for the appropriate valves size.
3. Reattach the Top Section to the top of the Indicator Post assembly.
4. Design and materials are subject to change without notice.