

# Model: **MV20-MG20T-175**

## Butterfly Valve


### Resilient Seated Screwed Ends



#### FEATURES / CHARACTERISTICS

Rating	175 PSI
Connections	ASME B1.20.3 NPT
Applications	Fire protection, potable water, etc.

Fusion bonded coating comply with AWWA C550

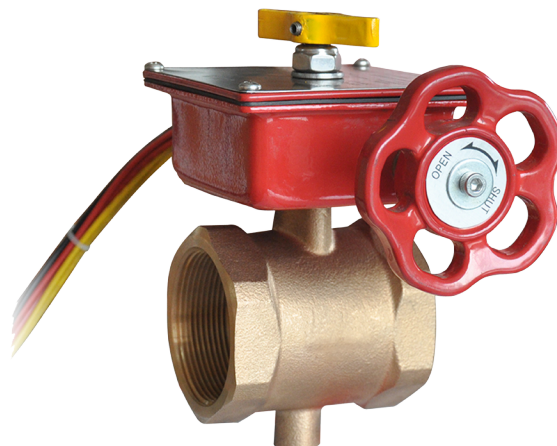

#### ON REQUEST

Other Pressure Ratings (subject to minimum order quantities)

#### MAXIMUM OPERATING PRESSURE

175 PSI (12.06 bar)

#### WORKING TEMPERATURE

32°F to 180°F (0°C to 82°C)

#### MATERIAL SPECIFICATIONS

PARTS	MATERIAL	SPECIFICATION
Body	Ductile Iron	ASTM A536 65-45-12
Disc	Steel+EPDM	ASTM 1045+EPDM
Upper Shaft	Stainless Steel	SS630
Lower Shaft	Stainless Steel	SS630
O-Ring	EPDM	
Gasket	Stainless Steel	AISI 304

#### DIMENSIONS(mm)

SIZE		H1	H2	L
mm	inch			
25	1"	37	29	54
32	1¼"	42	35	67
40	1½"	44	41	73
50	2"	50	50	82.4
65	2½"	55.5	55.5	104

\*All dimensions are nominal (indicative)  
Actual dimensions may vary

Factory installed UL listed double Tamper  
Switches For indoor and Outdoor Use.

