



DISMANTLING JOINTS


CARBON STEEL DISMANTLING JOINT, PN16

Model Number: **MV600-10**

FEATURES / CHARACTERISTICS

Rating	PN16
Connection	Flanged BS EN1092-2, PN16 (ex BS 4504)
Working Medium	Water

Carbon Steel Body, Stainless Steel or Carbon Steel
Nut/Bolts/Washer/Tie Rods, EPDM Sealing Ring

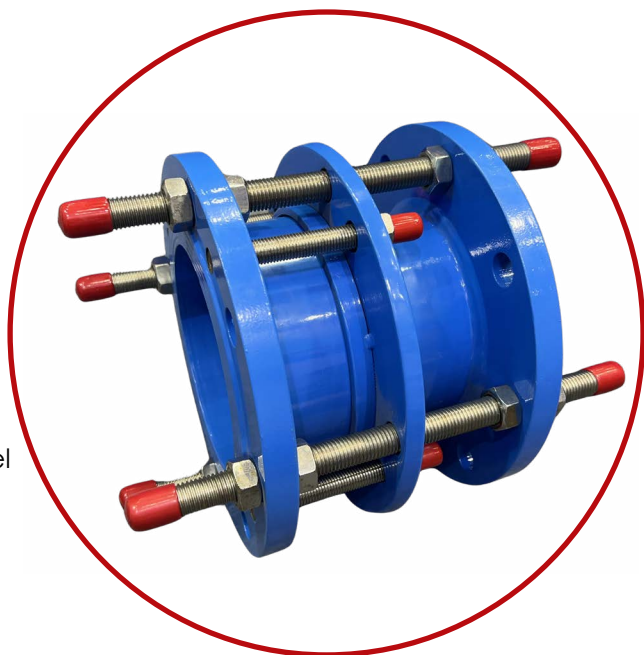

ON REQUEST

ANSI standards, Customized Length, Different Materials (subject to minimum order quantities).

HYDROSTATIC TEST PRESSURE



Shell- 24 bar

WORKING TEMPERATURE

16 Bar -10° C to 80° C water

MATERIAL SPECIFICATIONS

	PARTS	MATERIAL
1	Body	Carbon Steel
2	Sealing Ring	EPDM/NBR
3	Gland	Carbon Steel
4	Limited Short Pipe	Carbon Steel
5	Stud	Stainless Steel/CS Gal.
6	Nut	Stainless Steel/CS Gal.

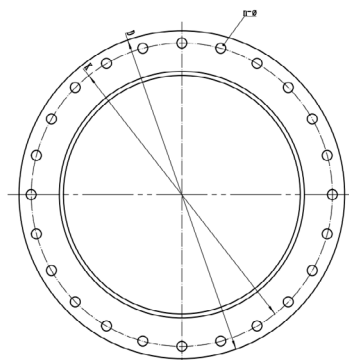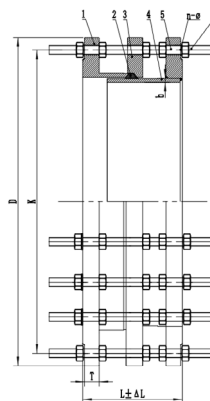

DIMENSIONS (mm)

Sizes		L	øD	K	N-Ød	ΔL
DN	inch					
50	2"	200	165	125	4-ø18	20
65	2 ½"	200	185	145	4-ø18	20
80	3"	200	200	160	8-ø18	20
100	4"	200	220	180	8-ø18	20
125	5"	200	250	210	8-ø18	20
150	6"	220	285	240	8-ø22	20
200	8"	220	340	295	12-ø22	20
250	10"	240	405	355	12-ø26	20
300	12"	270	460	410	12-ø26	20
350	14"	270	520	470	16-ø26	25
400	16"	290	580	525	16-ø30	25
450	18"	290	640	585	20-ø30	25
500	20"	310	715	650	20-ø33	25
600	24"	310	840	770	20-ø33	25

*All dimensions are nominal (indicative)
Actual dimensions may vary