



PRESSURE INDEPENDENT CONTROL VALVE

Maplef Red.0 / Red.1 / Red.1HF / Red.2

15-40 mm / 1/2"-1 1/2"

FEATURES / CHARACTERISTICS

Static Pressure	: 2500 kPa / 360 psi
End connections ¹	: A/AB: Fixed female ISO or NPT, ABV: Union end connection in brass alloy ISO or NPT
Housing taps	: AB/ABV: 1/4" ISO.
Control Characteristic	: Linear (may be converted to equal % on actuator)
Shut-off leakage	: ANSI / FCI 70-2 2006, Class IV / IEC 60534-4, Class IV
Stroke:	: 20 mm / 3/4" insert: 3.4 mm / 0.13 in 40 mm / 1 1/2" insert: 5.2 mm / 0.2 in
Flow Range:	
20 mm / 3/4" insert	: 0.0103-0.736 l/sec (0.163-11.7 GPM)
40 mm / 1 1/2" insert	: 0.240-1.29 l/sec (3.81-20.4 GPM)
Control range	: 1:1000 / IEC 60534
Rangeability	: 100:1
Turn down ratio	: 100:1



MAXIMUM CLOSE OFF/ OPERATIONAL PRESSURE

Max Close off Pressure	: 800 kPa / 116 psi
Max. Operational ΔP	: 800 kPaD / 116 psid

TEMPERATURE

Ambient temperature :	+1°C to +50°C (+34°F to +122°F)
Media temperature ² :	-20°C to +120°C (-4°F to +248°F)

MATERIAL SPECIFICATIONS (INSERT)

PARTS	MATERIAL
1 Insert	Glass-reinforced PSU/POM/PPS
2 Metal components (internal)	Stainless Steel
3 O-Rings	EPDM
4 Cone	PPS
5 Diaphragm	20 mm / 3/4" insert: EPDM 40 mm / 1 1/2" insert: Hydrogenated acrylonitrile-butadiene-rubber
6 Head Nut	Forged brass ASTM CuZn40Pb2

MATERIAL SPECIFICATIONS (VALVE)

PARTS	MATERIAL
1 Housing	DZR ASTM CuZn36Pb2As or Forged brass ASTM CuZn40Pb2 or
2 Ball Valve	ABV: Chemically nickel-plated brass ball

Note 1: NPT only available on request.

Note 2: Stated temperature rating is defined due to no external insert condensation.

MAPLEF MFT ACTUATORS (THERMAL)


Maplef Actuator ^{3/4}	MFT.0.2 ³	MFT.0.3 ³	MFT.0.4 ³
Supply voltage	24V AC -10%...+20%, 50/60 Hz	230V AC ±10%, 50/60 Hz	24V AC/DC -10%...+20%, 50/60 Hz
Type	Thermal	Thermal	Thermal
Power consumption	1.2W	1.2W	1.2W
Control signal ⁵	Analog 0-10V	ON/OFF	ON/OFF
Failsafe function	Normally closed	Normally closed	Normally closed
Operation time ⁶	App. 4.5 minutes	App. 4.5 minutes	App. 4.5 minutes
Ambient temperature	0°C to +60°C / +32°F to +140°F	0°C to +60°C / +32°F to +140°F	0°C to +60°C / +32°F to +140°F
Protection	IP54 including upside-down, class III	IP54 including upside-down, class II	IP54 including upside-down, class III
Cable	Plug-in, 1 m / 3 ft	Fixed, 1 m / 3 ft	Fixed, 1 m / 3 ft
Weight	0.12 kg / 0.26 lb	0.11 kg / 0.24 lb	0.11 kg / 0.24 lb

Note 3: Maplef warranty is voided using other actuators than supplied by Maplef Valves & Fitting LTD.


Note 4: Please note if mounted on Maplef Red.2 specified leakage rate to be exceeded.

Note 5: To ensure that the valve is in an open position during commissioning, the actuator will be delivered in open position and remain in this position until it is electrically operated first time.

Note 6: Closing time is approximately the double dependent on ambient temperature.



Maplef MFT.0.2



Maplef MFT.0.3/0.4



PRESSURE INDEPENDENT CONTROL VALVE


Maplef Red.0 / Red.1 / Red.1HF / Red.2

MAPLEF MFN / MFNP / MFNR ACTUATORS (GEAR)


Maplef Actuator ⁷	MFN.0.2	MFNP.0.2	MFNR.0.2	MNR.0.2-EQ
Supply voltage	24V AC/DC ±10%, 50/60 Hz	24V AC/DC ±10%, 50/60 Hz	24V AC/DC ±15%, 50/60 Hz	24V AC/DC ±15%, 50/60 Hz
Type	Electrical, bi-directional synchronous motor		Electrical, bi-directional step motor	
Power consumption	24V AC: 0.9VA standby / 2.5VA operating / 4.7VA max. 24V DC: 0.75W standby / 1.2W operating / 2.2W max.	24V AC: 0.9VA standby / 2.5VA operating / 4.7VA max. 24V DC: 0.75W standby / 1.2W operating / 2.2W max.	24V AC: 1VA standby / 6VA operating / 6VA max. 24V DC: 0.5W standby / 4W operating / 4W max.	24V AC: 1VA standby / 6VA operating / 6VA max. 24V DC: 0.5W standby / 4W operating / 4W max.
Control signal	Analog 0(2)-10V DC, <0.5mA	Analog 0(2)-10V DC, <0.5mA	Analog 0-10V DC, linear	Analog 0-10V DC, equal%
Feedback	Yes, control signal	No	No	No
Failsafe function	Fail in place	Fail in place	Fail in place	Fail in place
Auto stroke	Yes	Yes	No	No
Operation time	max 22 sec/mm	max 22 sec/mm	max 5.5 sec/mm	max 5.5 sec/mm
Ambient temperature	0°C to +50°C / +32°F to +122°F	0°C to +50°C / +32°F to +122°F	0°C to +50°C / +32°F to +122°F	0°C to +50°C / +32°F to +122°F
Media temperature	0°C to +120°C / +32°F to +248°F	0°C to +120°C / +32°F to +248°F	0°C to +120°C / +32°F to +248°F	0°C to +120°C / +32°F to +248°F
Humidity rating	0..85% rH, no condensation	0..85% rH, no condensation	0..80% rH, no condensation	0..80% rH, no condensation
Protection	IP54 including up-side-down, class III, indoor use only	IP54 including up-side-down, class III, indoor use only	IP54 including up-side-down, class III, indoor use only	IP54 including up-side-down, class III, indoor use only
Cable	Fixed 5 x 0.5 mm ² , 1.5 m / 5 x AWG20, 4.9 ft	Fixed 3 x 0.5 mm ² , 1.5 m / 3 x AWG20, 4.9 ft	Fixed 3 x 0.22 mm ² , 1.5 m / 3 x AWG24, 4.9 ft	Fixed 3 x 0.22 mm ² , 1.5 m / 3 x AWG24, 4.9 ft
Closing point adjustment	During operation the actuator will self-adjust according to the closing point and stroke length of the valve			
Weight	0.25 kg / 0.55 lb	0.25 kg / 0.55 lb	0.23 kg / 0.51 lb	0.23 kg / 0.51 lb

Maplef Actuator ⁷	MFNR.0.3	MFN.0.4
Supply voltage	110/230V AC ±10%, 50/60 Hz	24V AC/DC ±10%, 50/60 Hz
Type	Electrical, bi-directional step motor	Electrical, bi-directional synchronous motor
Power consumption	1VA standby / 6VA operating / 8VA max.	24V AC: 0.9 VA standby / 2.5VA operating / 4.7VA max. 24V DC: 0.75W standby / 1.2W operating / 2.2W max.
Control signal	Digital 2-position / 3-point floating	Digital 2-position / 3-point floating
Feedback	No	No
Failsafe function	Fail in place	Fail in place
Auto stroke	No	Yes
Operation time	27.2 sec/mm	max 22 sec/mm Reaction time: 0.8 sec
Ambient temperature	0°C to +50°C / +32°F to +122°F	0°C to +50°C / +32°F to +122°F
Media temperature	0°C to +120°C / +32°F to +122°F	0°C to +120°C / +32°F to +248°F
Humidity rating	0..80% rH, no condensation	0..85% rH, no condensation
Protection	IP54 including upside-down, class II, indoor use only	IP54 including upside-down, class III, indoor use only
Cable	Fixed 3 x 0.5 mm ² , 1.5 m / 3 x AWG20, 4.9 ft	Fixed 3 x 0.5 mm ² , 1.5 m / 3 x AWG20, 4.9 ft
Closing point adjustment	During operation the actuator will self-adjust according to the closing point and stroke length of the valve	
Weight	0.23 kg / 0.51 lb	0.25 kg / 0.55 lb

Note 7: Maplef warranty is voided using other actuators than supplied by Maplef Valves & Fitting LTD.



Maplef MFN.0.2/0.4 & MFNP.0.2



Maplef MFNR.0.x



PRESSURE INDEPENDENT CONTROL VALVE

Maplef Red.0 / Red.1 / Red.1HF / Red.2

MAPLEF MFN / MFNJ ACTUATORS (GEAR, FAILSAFE):


Maplef Actuator ^a	MFNJ.1.2	MFNJ.1.2-EQ
Supply voltage	24V AC/DC $\pm 15\%$, 50/60 Hz	24V AC/DC $\pm 15\%$, 50/60 Hz
Type	Electrical, bi-directional synchronous motor	
Power consumption	24V AC: 2.5VA standby / 2.5VA operating / 5VA max. 24V DC: 1.5W standby / 1.5W operating / 3W max.	24V AC: 2.5VA standby / 2.5VA operating / 5VA max. 24V DC: 1.5W standby / 1.5W operating / 3W max.
Control signal	Analog 0-10V DC, linear	Analog 0-10V DC, equal%
Feedback	Yes, 0-10V DC	Yes, 0-10V DC
Failsafe function	Close, optional open	Close, optional open
Auto stroke	No	No
Operation time	8 sec/mm	8 sec/mm
Ambient temperature	0°C to +50°C / +32°F to +122°F	0°C to +50°C / +32°F to +122°F
Media temperature	0°C to +95°C / +32°F to +203°F	0°C to +95°C / +32°F to +203°F
Humidity rating	10..90% rH, no condensation	10..90% rH, no condensation
Protection	IP54 no upside-down mounting, class III, indoor use only	IP54 no upside-down mounting, class III, indoor use only
Cable	Plug-in, 4 wires x 0.35 mm ² halogen free, 1.5 m 4 wires x AWG22 halogen free, 4.9 ft	Plug-in, 4 wires x 0.35 mm ² halogen free, 1.5 m 4 wires x AWG22 halogen free, 4.9 ft
Closing point adjustment	During operation the actuator will self-adjust according to the closing point of the valve	
Weight	0.30 kg / 0.66 lb	0.30 kg / 0.66 lb

Note 8: Maplef warranty is voided using other actuators than supplied by Maplef Valves & Fitting LTD.


MAPLEF MFN ACTUATORS (BUS):

Maplef Actuator ^a	MFN.0.2-BUS
Supply voltage	24V AC/DC $\pm 10\%$, 50/60 Hz
Type	Electrical, bi-directional synchronous motor
Power consumption	24V AC: 2.1VA standby / 3.6VA operating / 5.4VA max. 24V DC: 1.0W standby / 1.8W operating / 2.7W max.
Control signal	0-100% (BACnet or Modbus)
Feedback	Yes, 0-100% (BACnet or Modbus)
Failsafe function	Fail in place
Auto stroke	Yes
Operation time	22 sec/mm (alternatively 16 sec/mm or 28 sec/mm)
Ambient temperature	0°C to +50°C / +32°F to +122°F
Media temperature	10°C to +120°C / +14°F to +248°F
Humidity rating	0..85% rH, no condensation
Protection	IP54 including upside-down, class III, indoor use only
Cable	Group 1: Fixed, 2 x 2 wires x 0.34 mm ² , 1.5 m / 2 x 2 wires x AWG22, 4.9 ft Fixed, 2 wires x 0.50 mm ² , 1.5 m / 2 wires x AWG20, 4.9 ft Group 2: Fixed, 4 wires x 0.50 mm ² , 1.5 m / 4 wires x AWG20, 4.9 ft
Closing point adjustment	During operation the actuator will self-adjust according to the closing point and stroke length of the valve
Weight	0.35 kg / 0.77 lb

Note 9: Maplef warranty is voided using other actuators than supplied by Maplef Valves & Fitting LTD.



Maplef MFNJ



Maplef MFN.0.2-BUS



PRESSURE INDEPENDENT CONTROL VALVE

Maplef Red.0 / Red.1 / Red.1HF / Red.2

MAPLEF MFN.0.25/MFN.1.25 MODULATING ACTUATORS

Maplef Actuator ¹⁰	MFN.0.25	MFN.1.25
Supply voltage	24V AC/DC ±10%, 50/60 Hz	24V AC/DC ±10%, 50/60 Hz
Type	Electrical, Stepping Motor	
Power consumption	24V AC: V2.9VA operating (4.5VA max.) 24V DC: 1.37W operating (2.0W max.)	24V AC: V2.88VA operating (4.5VA max.) 24V DC: 1.35W operating (2.0W max.)
Control signal	Analog 0(2)-10V DC, <0.5mA	0(2)-10 VDC, Ri 500 kΩ.
Feedback	Yes, Control Signal	0(2)-10 VDC, max. 20mA
Failsafe function	No	Yes
Auto stroke	5 mm / 8 mm Automatic detection of the valve lift (self-stroking).	5.0 mm / 0.197 in (compensated)/(8.0mm/0.314 in)
Operation time	16 sec/mm	16 sec/mm
Ambient temperature	0°C to +50°C / +32°F to +122°F	0°C to +50°C / +32°F to +122°F
Media temperature	0°C to +100°C / +32°F to +212°F	0°C to +100°C / +32°F to +212°F
Humidity rating	5.-95% rH, no condensation	5.-95% rH, no condensation
Protection	IP54 incl. upside-down, KS C IEC 60529:2006	IP54 incl. upside-down, KS C IEC 60529:2006
Cable	Fixed, 4 wires x 0.326 mm ² , 1.5 meter Fixed, 4 wires x AWG22, 4.9 ft	4 wires x 0.326 mm ² , 1.5 meter Fixed, 4 wires x AWG22, 4.9 ft (Optional)
Closing point adjustment	During operation the actuator will self-adjust according to the closing point and stroke length of the valve	
Weight	0.23 kg / 0.51 lb	0.23 kg / 0.51 lb

MAPLEF MFN.0.15 ELECTRIC ON/OFF

Maplef Actuator ¹⁰	MFN.0.15
Supply voltage	220VAC, 50Hz/60Hz
Type	Electrical
Power consumption	Open : 3.5VA / 3VA (VAC) based on 220 VAC, 50Hz/60Hz Close : 4.5VA / 4VA (VAC) based on 220 VAC, 50Hz/60Hz
Input Signal	220VAC (L)
Characteristics	Linear
Control speed	16sec. 50Hz / 14sec. 60Hz
Actuating force	150N
Media temperature	0°C to +100°C / +32°F to +212°F
Humidity rating	5.-95% rH, no condensation
Protection	IP 54 (all directions)(according to EN 60529)
Cable	1m. With wire end sleeves
Stroke	Max 5 mm Automatic detection of the valve lift (self-stroking).
Material	Cover: PC Body /Housing: PC Swiveling nut: PC-Glass

Note 10: Maplef warranty is voided using other actuators than supplied by Maplef Valves & Fitting LTD.

PRESSURE INDEPENDENT CONTROL VALVE

Maplef Red.0 / Red.1 / Red.1HF / Red.2




DIMENSIONS AND WEIGHTS (NOMINAL)


Model no.	Valve model	Valve size	Insert size	L	H1	H2 MFT.0.2 Actuator	H3 MFT.0.3/0.4 Actuator	H4 MFN.0.2 MFN.0.2-BUS MFN.0.4 MFNP.0.2 Actuator	H5 MFNJ actuator	H6 MFNR actuator	End connections C ¹¹			Weight ¹²
											Female	Male	Sweat	
		mm (in)	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)	ISO (NPT)	ISO (NPT)	ISO	
MP.X.XX.04	A	15 (½)	20 (¾)	80 (3.15)	31 (1.22)	118 (4.65)	116 (4.57)	124 (4.88)	112 (4.41)	130 (5.12)	-	-	-	0.50 (1.10)
MP.X.XX.05		20 (¾)		0.44 (0.97)										
MP.X.XX.06		25 (1)		91 (3.58)										0.60 (1.32)
MP.X.XX.01	AB	15 (½)	20 (¾)	81 (3.19)	31 (1.22)	118 (4.65)	116 (4.57)	124 (4.88)	112 (4.41)	130 (5.12)	-	-	-	0.50 (1.10)
MP.X.XX.02		20 (¾)		85 (3.35)										0.52 (1.14)
MP.X.XX.07		25 (1)		102 (4.02)										0.69 (1.52)
MP.2.XX.14		25 (1)	40 (1½)	128 (5.04)	47 (1.85)	138 (5.43)	137 (5.39)	144 (5.67)	132 (5.20)	153 (6.02)	-	-	-	1.86 (4.10)
MP.2.XX.15		32 (1¼)												1.70 (3.75)
MP.X.XX.03		ABV	15 (½)	20 (¾)	122 (4.80)	33 (1.30)	118 (4.65)	116 (4.57)	124 (4.88)	112 (4.41)	130 (5.12)	22 (0.87)	24 (0.95)	20
	20 (¾)		22 (0.87)									25 (0.99)	20	
	25 (1)		-									39 (1.54)	22	
MP.2.XX.17	25 (1)		40 (1½)	162 (6.38)	42 (1.65)	138 (5.43)	137 (5.39)	144 (5.67)	132 (5.20)	153 (6.02)	35 (1.38)	40 (1.57)	34	2.14 (4.72)
	32 (1¼)										33 (1.30)	40 (1.57)	34	
	40 (1½)										33 (1.30)	42 (1.65)	-	

Note 11: Add end connection length to body length.


Note 12: Weight does not include end connections or actuator




Maplef Red.0/1 in
Maplef AB valve
DN15/20/25 (1/2", 3/4", 1")
with Maplef MFT.0.3/0.4 act.




Maplef Red.0/1 in
Maplef A valve
DN15/20/25 (1/2", 3/4", 1")
with Maplef MFT.0.2 actuator



Maplef Red.0/1 in
Maplef AB valve
DN15/20/25 (1/2", 3/4", 1")
w. Maplef MFNJ actuator



Maplef Red.0/1 in
Maplef AB valve
DN15/20/25 (1/2", 3/4", 1")
with Maplef MFNR actuator



Maplef Red.2 in
Maplef ABV valve
DN25/32/40 (1", 1 1/4", 1 1/2")
with Maplef MFN.0.2/0.2-BUS,
MFN.0.4 + MFNP.0.2 actuator



PRESSURE INDEPENDENT CONTROL VALVE

Maplef Red.0 / Red.1 / Red.1HF / Red.2

MODEL NUMBER SELECTION

MP . [Flow Range] . [Actuator] . [Housing] . [Plug] . [End Con. In] . [End Con. Out]. [Con. Std]

	PARTS	OPTIONS			
1	Flow Range	0 : 20 mm / 3/4" insert (low flow) 1 : 20 mm / 3/4" insert (medium flow) 1HF : 20 mm / 3/4" insert (high flow) 2 : 40 mm / 1 1/2" insert			
2	Type of actuator:	00 = No actuator			
			Thermal	Gear	Gear Failsafe
		24V Modulating	22 = MFT.0.2	32 = MFN.0.2 35 = MFNP.0.2 36 = MFNR.0.2 37 = MFNR.0.2-EQ 39 = MFN.0.2-BUS 80 = MFN.0.25	40 = MFNJ.1.2 41 = MFNJ.1.2-EQ 81 = MFN.1.25
		230V Digital	23 = MFT.0.3	38 = MFNR.0.3 82 = MFN.0.15	
	24V Digital	24 = MFT.0.4	34 = MFN.0.4		
3	Type of housing:	20 mm / 3/4" insert: 01=AB DN15 / 1/2" 02=AB DN20 / 3/4" 03=ABV.1 DN15-25 / 1/2"-1" 04=A DN15 / 1/2" 05=A DN20 / 3/4" 06=A DN25 / 1" 07= AB DN25 / 1"		40 mm / 1 1/2 insert: 14=AB DN25 / 1" 15=AB DN32 / 1 1/4" 17=ABV.2 DN25-40 / 1"- 1 1/2"	
4	P/t plug requirements:	0=no (p/t) plugs B=pressure/temperature plugs P=taps plugged			
5	Union End Connections (inlet x outlet):	0.0 = no union ends			
		Model and size	Female threaded	Male threaded	Sweat
		ABV.1 with Red insert, 20 mm	E = 15 mm / 1/2" F = 20 mm / 3/4"	H = 15 mm / 1/2" I = 20 mm / 3/4" J = 25 mm / 1"	K = 15 mm L = 18 mm M = 22 mm
	ABV.2 with Red insert, 40 mm	G = 25 mm / 1" P = 32 mm / 1 1/4" Q = 40 mm / 1 1/2"	J = 25 mm / 1" S = 32 mm / 1 1/4" T = 40 mm / 1 1/2"	N = 28 mm W = 35 mm	
6	Connection Standard:	I=ISO N=NPT			

Example:

MP.1.22.03.B.F.F.I = 20 mm (3/4") Maplef Red, medium flow, with an ABV.1-housing with p/t plugs and a 24V thermal modulating actuator and DN20 (3/4") ISO female union end connections

DESCRIPTION

Maplef Red Series – Pressure Independent Control Valves

The Maplef Red series comprises a range of pressure independent, two-way control valves designed for modulating operation. These valves are compatible with both digital and analog input signals, accepting 0(2)-10V, 3-point floating, or ON/OFF control.

Each valve is equipped with an adjustable maximum flow rate setting while maintaining full actuator stroke, ensuring accurate flow limitation and hydraulic balancing of the connected coil or zone.

Ideal for use in fan coil units, variable air volume (VAV) systems, and chilled ceiling applications, the Maplef Red series supports both heating and cooling control.

The series is available in three valve housing types: Maplef A, Maplef AB, and Maplef ABV.




PRESSURE INDEPENDENT CONTROL VALVE


Maplef Red.0 / Red.1 / Red.1HF / Red.2

WIRING INSTRUCTION









THERMAL MODULATING

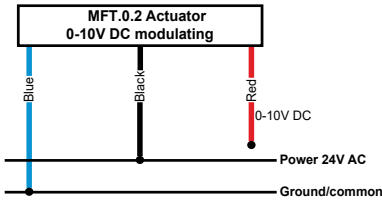


THERMAL ON/OFF

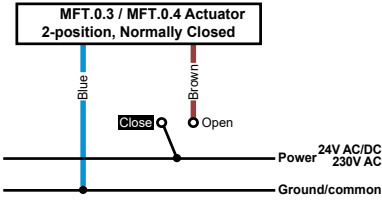


ELECTRICAL MODULATING

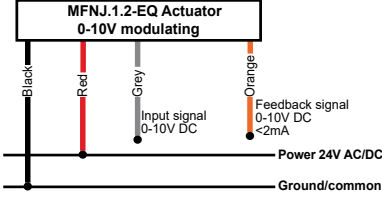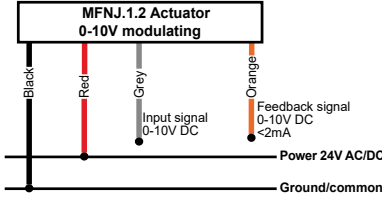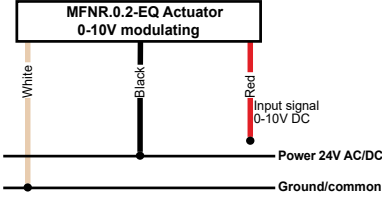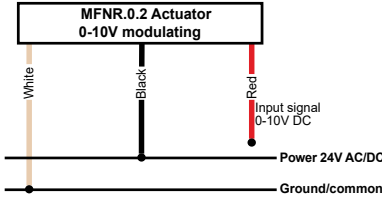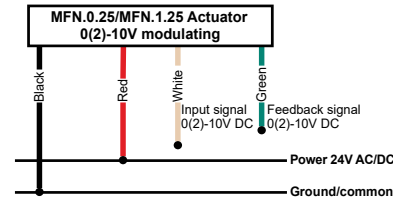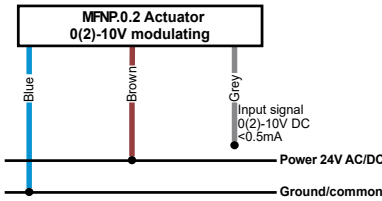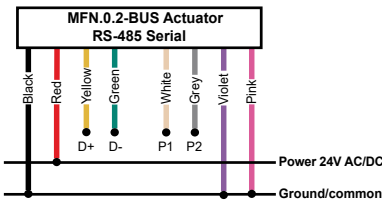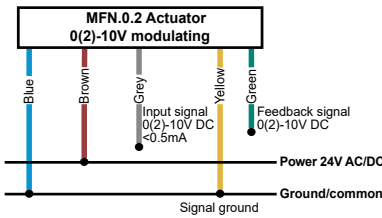



ELECTRICAL 2-POSITION

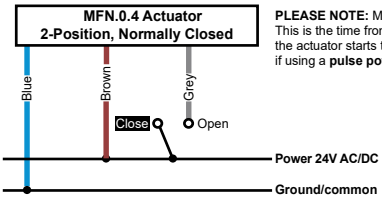

PLEASE NOTE: MFN.0.4 has a reaction time of 0.8 sec. This is the time from giving a 24V power signal until the actuator starts to move. This is particularly important if using a pulse power signal.

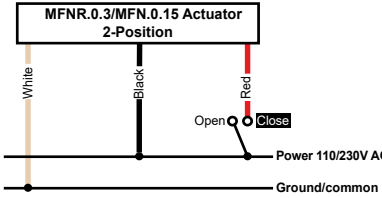

ELECTRICAL 3-POINT FLOATING

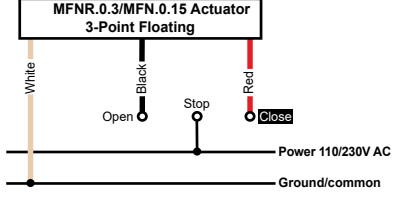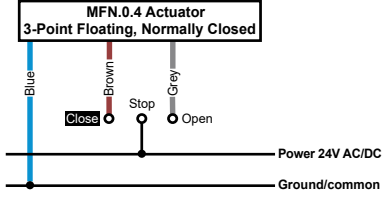



PRESSURE INDEPENDENT CONTROL VALVE

Maplef Red.0 / Red.1 / Red.1HF / Red.2

MAXIMUM FLOW RATE LIMITATION SETTINGS




A micrometer **setting of 3.4** as illustrated above corresponds to a maximum flow rate of

Red.0: 0.133 l/sec
(2.10 GPM)

Red.1: 0.257 l/sec
(4.08 GPM)


Red.2: 0.975 l/sec
(15.5 GPM)



Scale setting for **Red.1HF** is reversed.

A micrometer **setting of 3.4** as illustrated above corresponds to a maximum flow rate of

Red.1HF: 0.575 l/sec
(9.12 GPM)



Use the special de-

Maplef Red													
Insert size: 20 mm · 3/4"										Insert size: 40 mm · 1 1/2"			
Nominal flow rate	16-600 kPaD · 2.3-87 psid ¹²			30-800 kPaD · 4.4-116 psid ¹³			35-800 kPaD · 5.1-116 psid ¹³			16-800 kPaD · 2.3-116 psid			Setting
	Red.0 (grey O-ring)			Red.1 (black O-ring)			Red.1HF (black O-ring)			Red.2 (black O-ring)			
	l/sec	l/hr	GPM	l/sec	l/hr	GPM	l/sec	l/hr	GPM	l/sec	l/hr	GPM	
	-	-	-	0.0178	64	0.282	-	-	-	0.240	865	3.81	1.0
	0.0103	37	0.163	0.0393	142	0.624	-	-	-	0.282	1010	4.46	1.1
	0.0233	84	0.370	0.0580	209	0.920	-	-	-	0.322	1160	5.10	1.2
	0.0322	116	0.510	0.0743	268	1.180	-	-	-	0.361	1300	5.72	1.3
	0.0419	151	0.664	0.0887	319	1.41	-	-	-	0.399	1430	6.32	1.4
	0.0500	180	0.792	0.102	366	1.61	0.172	620	2.73	0.435	1570	6.90	1.5
	0.0569	205	0.902	0.113	408	1.80	0.200	720	3.17	0.471	1700	7.47	1.6
	0.0650	234	1.03	0.124	446	1.96	0.228	820	3.61	0.506	1820	8.02	1.7
	0.0719	259	1.14	0.134	482	2.12	0.258	930	4.10	0.540	1940	8.56	1.8
	0.0781	281	1.24	0.143	516	2.27	0.294	1060	4.67	0.573	2060	9.08	1.9
	0.0839	302	1.33	0.152	549	2.42	0.325	1170	5.15	0.605	2180	9.59	2.0
	0.0889	320	1.41	0.161	580	2.56	0.350	1260	5.55	0.636	2290	10.1	2.1
	0.0942	339	1.49	0.170	611	2.69	0.375	1350	5.95	0.667	2400	10.6	2.2
	0.0981	353	1.55	0.178	641	2.82	0.396	1430	6.28	0.696	2510	11.0	2.3
	0.103	371	1.63	0.186	671	2.95	0.417	1500	6.61	0.725	2610	11.5	2.4
	0.106	381	1.68	0.194	700	3.08	0.439	1580	6.96	0.753	2710	11.9	2.5
	0.109	394	1.73	0.202	728	3.21	0.458	1650	7.27	0.780	2810	12.4	2.6
	0.113	406	1.79	0.210	756	3.33	0.481	1730	7.62	0.807	2900	12.8	2.7
	0.115	414	1.82	0.218	783	3.45	0.500	1800	7.93	0.832	3000	13.2	2.8
	0.119	428	1.88	0.225	810	3.56	0.522	1880	8.28	0.858	3090	13.6	2.9
	0.122	439	1.93	0.232	835	3.68	0.542	1950	8.59	0.882	3180	14.0	3.0
	0.125	449	1.98	0.239	860	3.79	0.550	1980	8.72	0.906	3260	14.4	3.1
	0.127	458	2.02	0.245	883	3.89	0.558	2010	8.85	0.930	3350	14.7	3.2
	0.130	468	2.06	0.252	906	3.99	0.567	2040	8.99	0.953	3430	15.1	3.3
	0.133	477	2.10	0.257	927	4.08	0.575	2070	9.12	0.975	3510	15.5	3.4
	0.135	486	2.14	0.263	946	4.17	0.583	2100	9.25	0.997	3590	15.8	3.5
	0.137	494	2.17	0.268	965	4.25	0.597	2150	9.47	1.02	3670	16.1	3.6
	0.140	503	2.21	0.273	982	4.32	0.611	2200	9.69	1.04	3740	16.5	3.7
	0.142	511	2.25	0.277	998	4.39	0.625	2250	9.91	1.06	3820	16.8	3.8
	0.144	518	2.28	0.281	1010	4.46	0.639	2300	10.1	1.08	3890	17.1	3.9
	0.146	526	2.31	0.285	1020	4.51	0.653	2350	10.4	1.10	3960	17.4	4.0
0.148	532	2.34	0.288	1040	4.57	0.661	2380	10.5	1.12	4030	17.7	4.1	
0.149	538	2.37	0.291	1050	4.61	0.669	2410	10.6	1.14	4100	18.1	4.2	
0.151	544	2.39	0.294	1060	4.66	0.678	2440	10.7	1.16	4170	18.4	4.3	
0.153	549	2.42	0.296	1070	4.70	0.686	2470	10.9	1.18	4240	18.7	4.4	
0.154	553	2.43	0.299	1080	4.73	0.694	2500	11.0	1.20	4300	19.0	4.5	
0.155	559	2.46	0.301	1080	4.77	0.703	2530	11.1	1.21	4370	19.2	4.6	
0.156	563	2.48	0.303	1090	4.80	0.711	2560	11.3	1.23	4440	19.5	4.7	
0.158	567	2.50	0.305	1100	4.83	0.719	2590	11.4	1.25	4500	19.8	4.8	
0.159	571	2.51	0.307	1100	4.86	0.728	2620	11.5	1.27	4570	20.1	4.9	
0.160	575	2.53	0.308	1110	4.89	0.736	2650	11.7	1.29	4630	20.4	5.0	

Accuracy: Greatest of either ±10% of controlled flow rate or ±5% of maximum flow rate.

Note 12: If used in pressure range 200-600 kPaD (29-87 psid), accuracy of -20% / +0% applies.

Note 13: If used in pressure range 400-800 kPaD (58-116 psid), accuracy of -20% / +0% applies.



PRESSURE INDEPENDENT CONTROL VALVE

Maplef Red.0 / Red.1 / Red.1HF / Red.2

GENERAL SPECIFICATIONS

1. PRESSURE INDEPENDENT DYNAMIC CONTROL VALVES – MAPLEF RED

- 1.1 Contractor shall install the pressure independent dynamic control valves where indicated in the project drawings.
- 1.2 Valve shall be an electronic, dynamic, modulating, 2-way, pressure independent control device.
- 1.3 The pressure independent dynamic control valve shall accurately regulate flow, independent of system pressure fluctuations.
- 1.4 The valve's maximum flow setting shall be adjustable to 41 discrete positions, tailored to the specific valve size.
- 1.5 Valve housing shall be permanently marked to indicate the direction of flow.

2. VALVE ACTUATORS – MAPLEF SERIES

Multiple actuator options are available for use with Maplef Red valves, offering flexible control signal compatibility and high-performance operation. All actuators are designed for precise control and ease of installation.

2.a. Maplef MFT actuators

- 2.a.1. Actuator housing shall be rated to IP54, including upside-down mounting.
- 2.a.2. Actuator shall be driven by 24V or 230V AC, and shall depending on actuator choice accept 0-10V DC or ON/OFF control signal.
- 2.a.3. Actuator shall use full stroke and provide full authority.
- 2.a.4. Actuator shall have visible indication of stroke position.
- 2.a.5. Failsafe function shall be available on all version.

OR....

2.b. Maplef MFN actuators

- 2.b.1. Actuator housing shall be rated to IP54. 360° mounting shall be acceptable.
- 2.b.2. Actuator shall be driven by 24V AC/DC and shall depending on actuator choice accept 0(2)-10V DC, 3-point floating or 2-position control signal.
- 2.b.3. Actuator shall use full stroke and provide full authority.
- 2.b.4. Actuator shall have visible indication of stroke position.
- 2.b.5. Feedback signal equal to control signal shall be standard on modulating versions.
- 2.b.6. Optional auto stroke function shall be available on modulating version.
- 2.b.7. Override shall be possible.
- 2.b.8. Optional bus version, with choice of BACnet or Modbus, shall be available. Bus version shall provide remote setting and control of actuator.

OR....

2.c. Maplef MFNP actuators

- 2.c.1. Actuator housing shall be rated to IP54. 360° mounting shall be acceptable.
- 2.c.2. Actuator shall be driven by 24V AC/DC and accept 0(2)-10V DC control signal.
- 2.c.3. Actuator shall use full stroke and provide full au-

thority.

2.c.4. Actuator shall have visible indication of stroke position.

2.c.5. Optional auto stroke function shall be available on modulating version.

2.c.6. Electrical override shall be possible.

OR....

2.d. Maplef MFNR actuators

2.d.1. Actuator housing shall be rated to IP54. 360° mounting shall be acceptable.

2.d.2. Actuator shall be driven by 24V AC/DC or 110V/230V AC, and shall depending on actuator choice and accept 0(2)-10V DC, 3-point floating or 2-position control signal.

2.d.3. Actuator shall use full stroke and provide full authority.

2.d.4. Actuator shall have visible indication of stroke position.

2.d.5. Manual override shall be possible.

OR....

2.e. Maplef MFNJ actuators

2.e.1. Actuator housing shall be rated to IP54. 180° mounting shall be acceptable.

2.e.2. Actuator shall be driven by 24V AC/DC, and shall accept 0-10V DC control signal.

2.e.3. Actuator shall use full stroke and provide full authority.

2.e.4. Actuator shall have visible indication of stroke position.

2.e.5. Feedback signal of 0-10V DC shall be standard.

2.e.6. Failsafe version shall be standard.

3. VALVE HOUSING

3.a. Maplef A

3.a.1. Valve housing shall consist of forged brass ASTM CuZn40Pb2 or DZR ASTM CuZn36Pb2As, rated at no less than 2500 kPa (360 psi) static pressure at +120°C (+248°F).

OR....

3.b. Maplef AB

3.b.1. Valve housing shall consist of forged brass ASTM CuZn40Pb2 or DZR ASTM CuZn36Pb2As, rated at no less than 2500 kPa (360 psi) static pressure at +120°C (+248°F).

3.b.2. Pressure/temperature test plugs for verifying accuracy of flow performance shall be available for all valve sizes.

OR....

3.c. Maplef ABV

3.c.1. Valve housing shall consist of forged brass ASTM CuZn40Pb2, rated at no less than 2500 kPa (360 psi) static pressure at +120°C (+248°F).

3.c.2. Valve ball shall consist of chemically nickel-plated brass (ASTM CuZn40Pb2).

3.c.3. Pressure/temperature test plugs for verifying accuracy of flow performance shall be available for all valve sizes.



PRESSURE INDEPENDENT CONTROL VALVE

Maplef Red.0 / Red.1 / Red.1HF / Red.2

GENERAL SPECIFICATIONS (..continued)

4. FLOW REGULATION UNIT

4.1. Flow regulation unit shall consist of glass-reinforced PSU/POM/PPS with an EPDM diaphragm (20 mm / 3/4" insert) or a hydrogenated acrylonitrile-butadiene-rubber diaphragm (40 mm / 1 1/2" insert).

4.2. Flow regulation unit shall be readily accessible, for change-out or maintenance. Flow regulation unit shall be adjustable with the valve in-line and the system in operation.

4.3. Flow regulation unit shall be externally adjustable to 1 of 41 different flow rates without limiting the stroke length; shall be available in 3 different operational pressure ranges for DN15/20/25 (1/2", 3/4", 1") and 1 operational pressure range for DN25/32/40 (1", 1 1/4", 1 1/2"); minimum range shall be capable of being activated by 16 kPaD (2.3 psid). Further, the flow regulation unit shall be capable of controlling the flow within $\pm 10\%$ of controlled flow or $\pm 5\%$ of maximum flow.

APPLICATION AND SCHEMATIC EXAMPLE

