



FLOAT VALVE

BRASS FLOAT VALVE WITH PLASTIC BALL, PN10

Model Number: MV210 - 11

FEATURES / CHARACTERISTICS

Rating	PN10
Connection	BS EN 10226-1 BSP Threaded(ex BS21)
Working Medium	Water

Brass Body, PP Float Ball,
Piston Type

ON REQUEST

NPT Threads (subject to minimum order quantities)

HYDROSTATIC TEST PRESSURE


Shell- 15 bar
Seat- 11 bar

WORKING TEMPERATURE

10 Bar -10° C to 100° C water

MATERIAL SPECIFICATIONS

SR.	PARTS	MATERIAL
1	Ball	Brass CW614N
2	Nut	Brass CW614N
3	Gasket	EPDM
4	Stem Rod	Brass CW614N
5	Hinge Pin	Brass CW614N
6	Hinge	Brass CW614N
7	Float Ball	PP

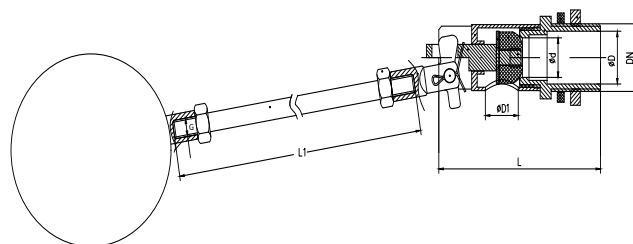

DIMENSIONS (mm)

Sizes		L	L1	d	D	D1	G	Ball (IN)
DN	inch							
15	½"	78	260	9	15.5	14	M8	4.5"
20	¾"	78	260	9	20	14	M8	5"
25	1"	90	360	10	26	18	M10	6"
32	1¼"	148	375	22	36.5	33	M12	8"
40	1 ½"	165	458	22	40	33	M12	10"
50	2"	170	495	22	51.5	33	M12	10"
65	2 ½"	195	625	41	68.5	63	M14	12"
80	3"	195	625	42	81.5	63	M14	12"
100	4"	195	625	42	105.5	64	M14	12"

*All dimensions are nominal (indicative)
Actual dimensions may vary