



# BALL VALVE

**DZR TWO PIECE, EXTENDED STEM, PN25**

**Model Number: MV10-11216EXT**

## FEATURES / CHARACTERISTICS

Rating	PN25
Connections	BS EN 10226-1
	BSPP Threaded (ex BS21)
Working Medium	Water, Oil and Steam

Two Piece Body, Full Bore, Extended Stem , PTFE Seats and Stem Seals

## ON REQUEST

NPT Threads, (subject to minimum order quantities)

## HYDROSTATIC TEST PRESSURE

Shell- 37.5 bar


Seat- 27.5 bar

## WORKING TEMPERATURE

25 Bar -10° C to 110° C water

## MATERIAL SPECIFICATIONS

	PARTS	MATERIAL
1	Seat Retainer	DZR CW602N
2	Seat	PTFE
3	Ball	DZR CW602N
4	Body	DZR CW602N
5	Stem	DZR CW602N
6	O-Ring	EPDM
7	O-Ring	EPDM
8	Extension Housing	Brass CW614N
9	Extension Stem	Brass CW614N
10	Gasket	Brass CW614N
11	Lever Cover	PVC
12	Lever	Mild Steel
13	Lever Nut	Stainless Steel 304

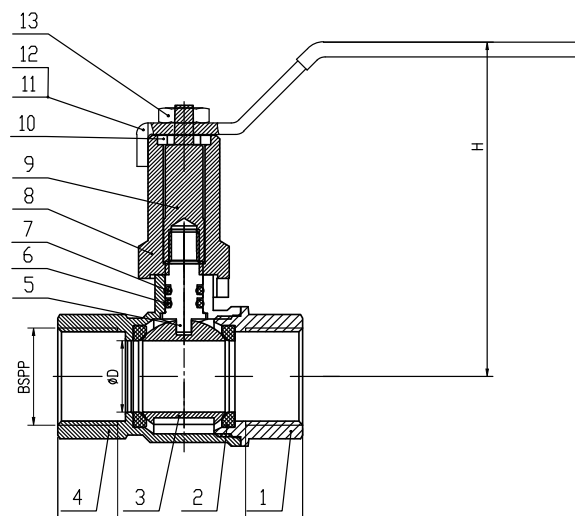

## DIMENSIONS (mm)

Sizes		L	L1	L2	ØD	H
DN	inch					
15	½"	60	16.8	92	14	84
20	¾"	67	17.7	92	19	87
25	1"	76	19.2	105	24	95
32	1¼"	93	23	134	32	108
40	1½"	101	23	134	40	114
50	2"	122	27.3	134	49	130

\*All dimensions are nominal (indicative)  
Actual dimensions may vary